




# assembly instructions

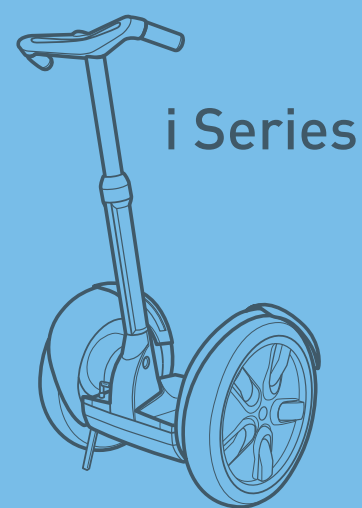

i Series

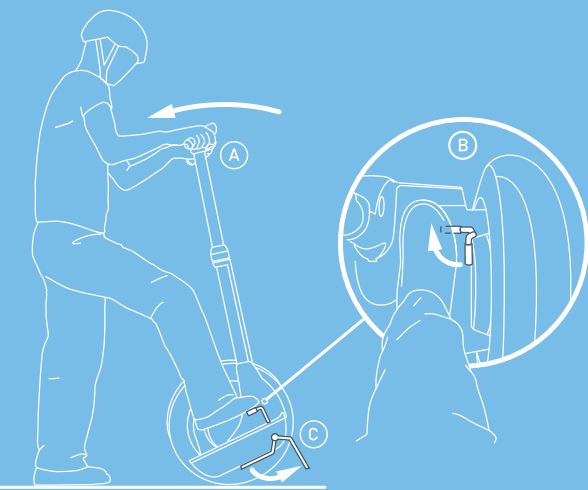

(i Series only) Tilt the Segway HT Handlebar back toward you to deploy (or retract) the Parking Stand. **Make sure to retract the Parking Stand prior to moving the Segway HT.**

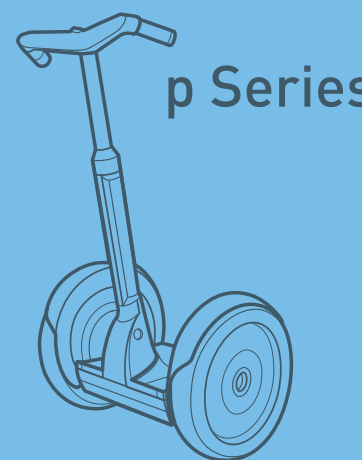

p Series




Segway XT



Segway GT

Before installing the Golf Bag Carrier, we recommend that you learn to ride as described in Riders' Guide and Safety Video. The Golf Bag Carrier kit for the Segway Golf Transporter (GT) ships in a separate box, with additional instructions and warnings for proper installation and use. To reduce risk of injury, be sure to follow those separate instructions when installing and riding with the Golf Bag Carrier.

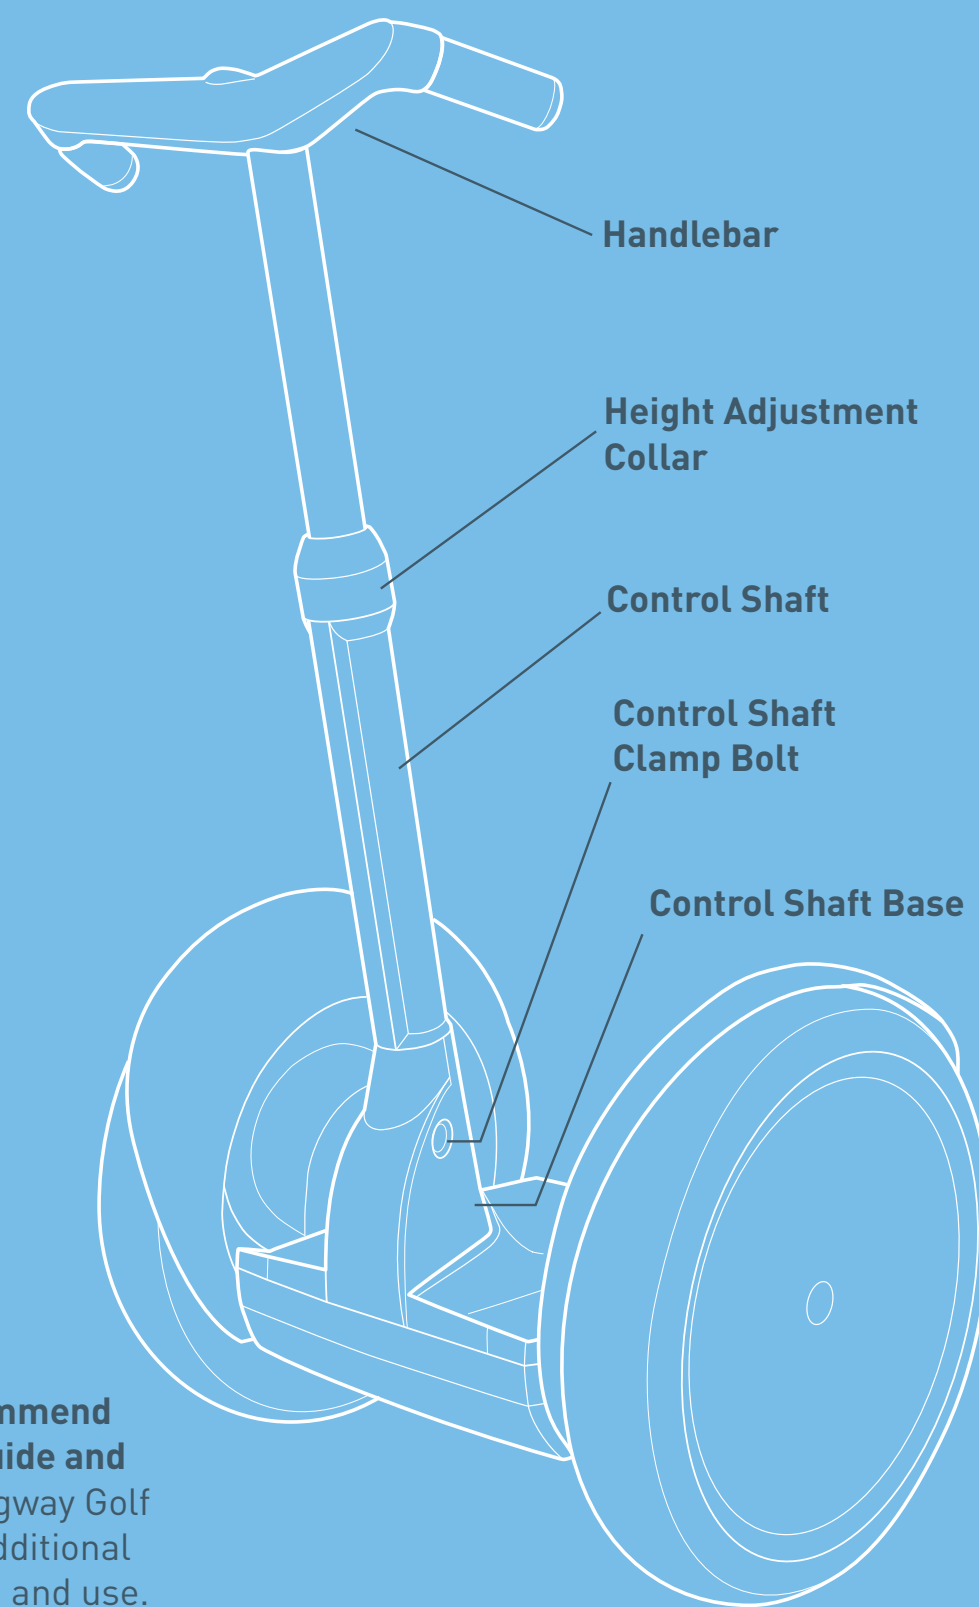

## ⚠ WARNING!

### RISK OF DEATH OR SERIOUS INJURY


Whenever you ride the Segway HT, you risk death or serious injury from loss of control, collisions and falls. To reduce risk of injury, you must read and follow all instructions and warnings in the Riders' Guide for your Segway HT model and you must watch the Safety Video.

Questions? Contact an Authorized Segway Dealer.  
For a list of Dealers, visit [www.segway.com](http://www.segway.com).

## 1

### unpack your Segway HT


- A Lift out the top box (containing the Handlebar/Control Shaft Assembly, Riders' Guide, Reference Manual, Safety Video, Keys, Wrench Set, Control Shaft Clamp Bolt and Power Cord).
- B Place the box on its side, remove the insert, and roll out the base of your Segway HT.
- C Keep all packaging materials for future use.

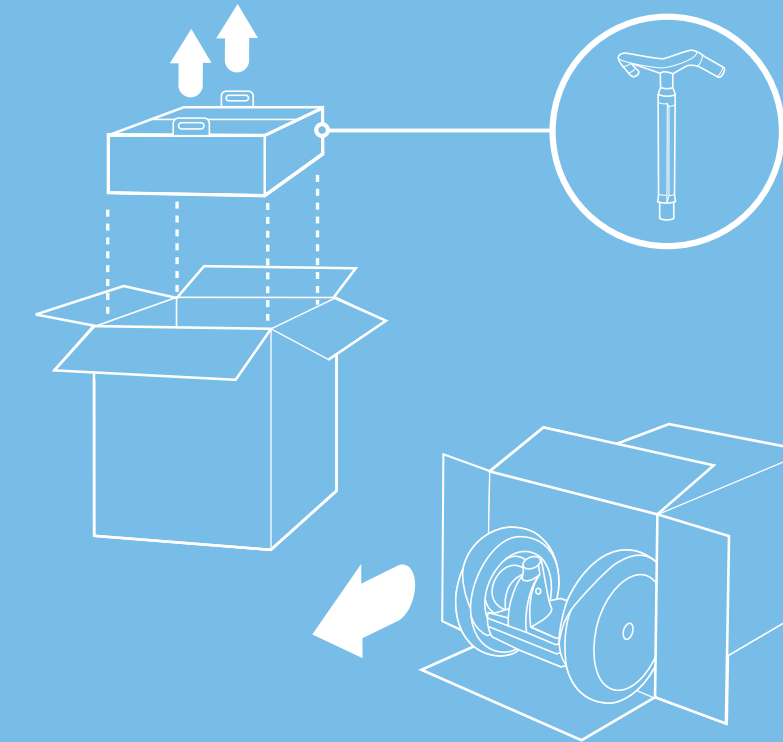

## 2


### connect the handlebar/control shaft assembly to the base

- A Reach into the Control Shaft and pull down the tag to access the Control Shaft Cords. Connect black to black, and yellow to yellow. Make sure prongs are properly aligned and snapped into place. The connection of the black Control Shaft Cords produces a tone.
- B Loosen the Height Adjustment Collar and extend the Handlebar/Control Shaft Assembly approximately 6 inches (15 cm). Then, tighten the Height Adjustment Collar.
- C Insert the bottom of the Handlebar/Control Shaft Assembly into the opening in the Control Shaft Base. Push the Handlebar/Control Shaft Assembly all the way in so that the rubber O-ring near the bottom contacts the Control Shaft Base. Be careful not to pinch the cords.
- D Lay the Segway HT down forward onto the Handlebar to properly align the Handlebar parallel with the front of the base.
- E Install and securely tighten the Control Shaft Clamp Bolt using the 5 mm Hex Wrench from the Wrench Set.

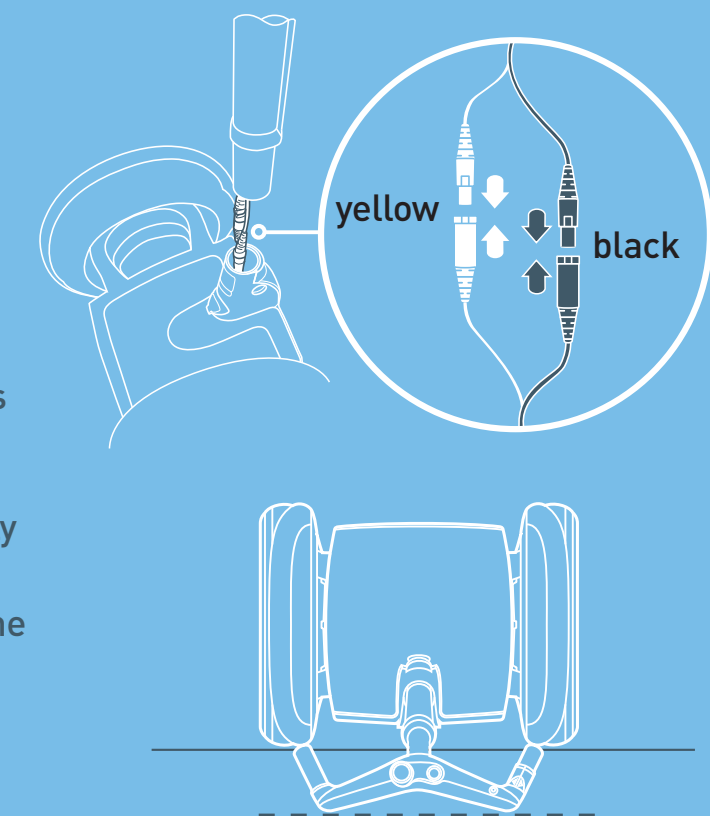

## 3

### charge batteries

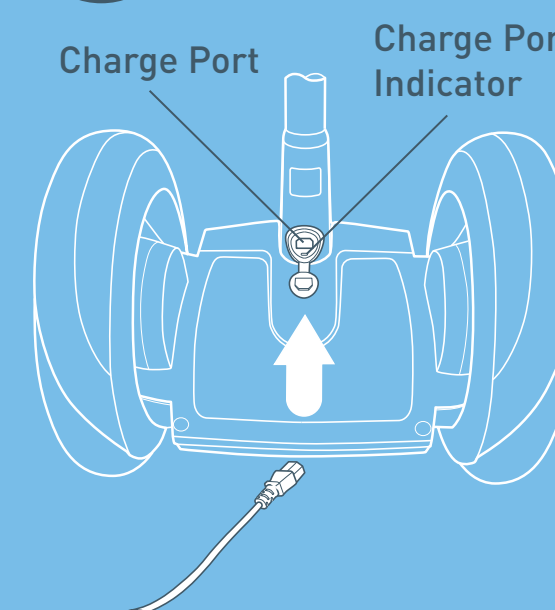

- A Insert the Power Cord into the Charge Port and into a grounded AC outlet (100 to 240 V; 50 to 60 Hz).
- B Check for the green light in the Charge Port Indicator.
- C Charge for at least 12 hours before your first use. Follow instructions in the Reference Manual for future charging.

The Reference Manual contains important instructions regarding battery charging. Follow those instructions to maximize battery life.